




Shubham Pack®

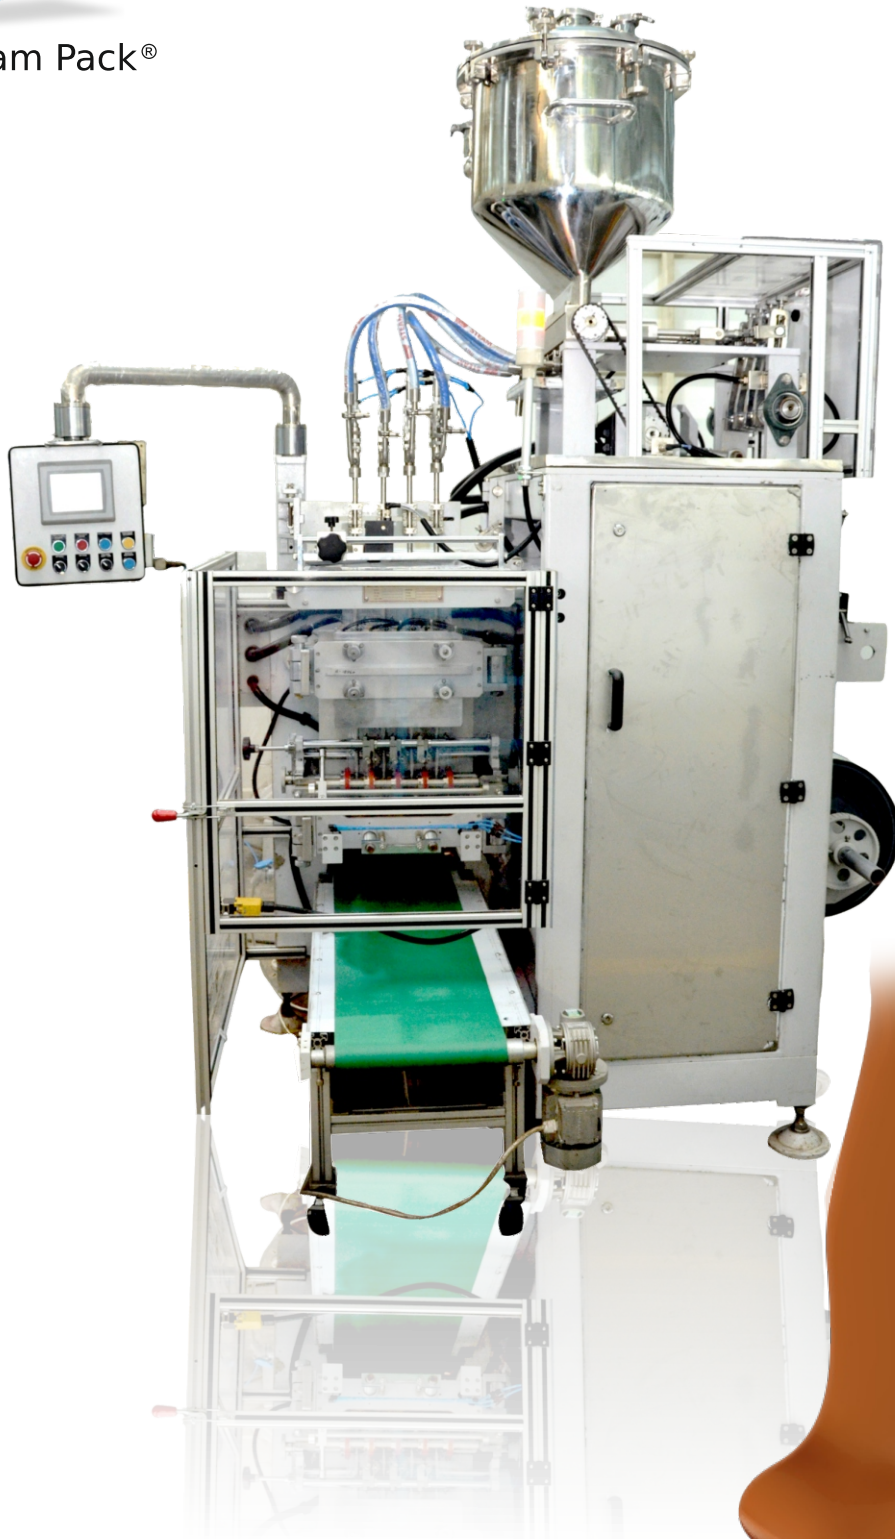

SPM-600 L Delite

For Liquid &
Highly Viscous Paste Products





SPM-600 L Delite

(Parallel to Base-Compact Model)

For Liquid & Highly Viscous Paste Products

(Ketchup, Jam, Mayonnaise, Honey, Peanut Paste, Shampoo, Conditioner, Cream)



SPECIFICATIONS

Sealing Style	4 Side Seal
Speed	40 - 60 Strokes / minutes (Depends upon the type of product & quantity to be filled)
No. of Tracks	Depends upon the width of the pouch
Laminate Specification	Roll Width 600 mm max. Roll Dia 500 mm max. Reel Core I.D. 76 mm.
Max. Length of Pouch	165 mm max.
Packing Material	Laminates with one side heat sealable
Filling Capacity	Powder 5g - 100g Liquid 1ml - 50 ml
Product To Be Packed	Powder & Liquids / Pastes within dosable viscosity range
Sealing Drives	CAM DRIVEN BY AC MOTOR
Filling Mechanism	Powder : Auger Filler / Volumetric Cup Filler Liquid : Piston Filler / Solenoid Valve Filling System
Sealing Type	Plain / Line / Serration
Perforation and Cutting	Zig Zag Perforation
Laminate Roll Unwind	Through Dancing Roller
Laminate Draw Off System	Servo Driven
Control Panel	Air Cooled with all applicable standards
Contact Parts	SS 316L
Batch Cutter Operation	Pneumatic Operated
Mat Format	As per Requirement
Electrical Spec.	6 KW, 3 Phase, 415 V, 50/60 Hz
Layout Dimensions	Length 2000 mm Width 2000 mm Height 2800 mm
Machine Weight	Net Weight 1800 Kgs. Gross weight 2200 Kgs.
Air Compressor	3 CFM @ 6 Bar (Compressor is not in the scope of supply)
Power Consumption	6 - 8 KW Approx.
Scrap Rate	Less than 1%*
Machine Color	Shell Grey - Powder coated.
Weight Variation	Within +/- 1%** of the filled quantity
Temp Controller	PID Based
Embossing Provision	Provision Given (Digits not included)

Corporate Office and Works: B-8A, Sector 59 Part II, Ballabgarh, Faridabad - 121004, Haryana (India)

Mobile: +91 813 019 2000/2001

Phone: +91 129 42 723 50/51/52/53/54/55

E-mail : marketing@shubhampack.com,ccare@shubhampack.com
export@shubhampack.com,shubham@shubhampack.com