




Shubham Pack®

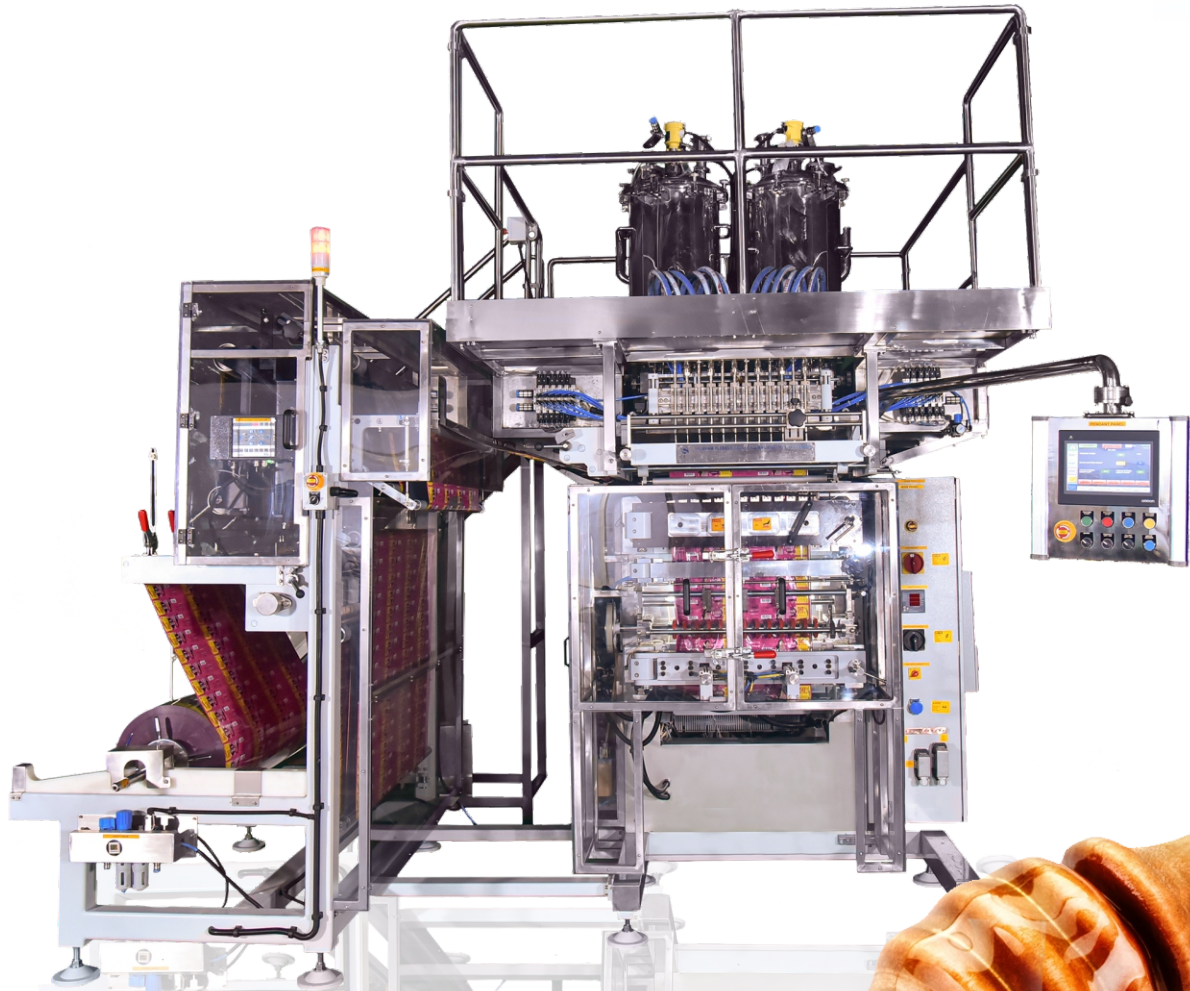

SPM-1200 L

For Liquid & Viscous Paste Products



SPM-1200 L

For Liquid & Viscous Paste Products

(Ketchup, Jam, Mayonnaise, Honey, Peanut Paste, Shampoo, Conditioner, Cream)



SPECIFICATIONS

Sealing Style	4 Side Seal
Speed	100 - 150 Strokes / minute maximum (Depends upon the type of product & quantity to be filled)
No. Of Tracks	Depends upon the width of the pouch
Laminate Specification	Width - 1200 mm max. Roll Dia - 600mm. max. (800mm Dia. optional) Reel Core I.D.- 152/76 mm
Packing Material	Laminates with one side heat sealable
Filling Capacity	1ml-200ml (depending upon Viscosity)
Product To Be Packed	Liquid/Semi Liquid /Paste of dosable viscosity
Laminate Draw Off System	PLC based Servo Driven
Sealing Drives	Horizontal Sealing Unit - Servo Driven Vertical Sealing Unit - Servo Driven
Filling Mechanism	Piston filler - Servo Driven Dosing valve - Servo Driven
Perforation and Cutting	Pneumatic Operated control by PLC
Laminate Roll Unwind	Motor driven - Bonfiglioli Geared Motor
Control	Through Touch Screen Panel (HMI)
Laminate Tracking System	E+L web aligner - Digital
Main Control Panel	Air cooled panel - Rittal Make
Contact Parts	SS 304 / SS 316 L
Machine Structure	MS Fabricated Powder coated with SS 304 cladding where as required
Batch Cutting	Can be programmed through PLC
Mat Format	In built feature of the Machine
Electrical Spec.	3 Phase, 415 V, 50/60 Hz Connected load - 22 - 25 KW Consumption - 18 - 20 KW PLC controlled Operations RTD module with PLC for Temperature controllers
Layout Dimensions	Length - 3400 mm Width - 2800 mm Height - 3100 mm
Machine Weight	Net Weight - 4000 kgs Gross weight - 4200 kgs
Compressed Air	3 CFM @ 6 Bar (Compressor is not in the scope of supply)
Pneumatics	SMC / FESTO
Machine Efficiency	95%*
Scrap Rate	Less than 1%*
Machine Colour	Shell Grey - Powder coated.
Weight Variation	Within +/- 1%** of the filled quantity
New Technology Innovation Development	<ul style="list-style-type: none">Industry 4.0 Machine based.Recyclable Laminate (BOPP,B OPP-PE, PE PE) compatible Machine

Corporate Office and Works: B-8A, Sector 59 Part II, Ballabgarh, Faridabad - 121004, Haryana (India)

Mobile: +91 813 019 2000/2001

Phone: +91 129 42 723 50/51/52/53/54/55

E-mail : marketing@shubhampack.com, ccare@shubhampack.com
export@shubhampack.com, shubham@shubhampack.com